

 *Italianor*TM
ITALIA LA TECNOLOGIA





THE PERFECT ARM FOR YOUR GATE


MODEL: IT-321

Technical Specifications:

MAIN POWER REQUIREMENTS	220~240VAC 50/60Hz 1 PHASE
OPERATING VOLTAGE	24VDC FOR NORMAL SPEED 12VDC FOR ENDING SPEED
MOTOR POWER CONSUMPTION	25watt PER ARM
DRIVING METHOD	4 START BALL SCREW DRIVEN PISTON TYPE
GEARBOX	THREE STEPS PLANETARY REDUCER
MAX. PISTON STROKE	320mm
MAX. PISTON SPEED	30mm/sec
OPERATING CYCLE	7 SECOND PER 90° (APPROX.)
MAX. WEIGHT OF GATE	400KG PER WING
MAX. LENGTH OF GATE	3 METER PER WING
CONTROL DEVICE	MICROCOMPUTER BASED
SAFETY CLUTCH	LATEST EXCLUSIVE LINEAR 4 START BALL SCREW ENHANCE 4 TIME FAST OF STABLE CURRENT SENSING TO ELECTRONIC CONTROLLER
SAFETY BARRIER	INFRARED BEAM SENSOR (OPTIONAL)
BACKUP BATTERY	12V 7AH
CASING MATERIAL	WEATHERPROOF AND RUST RESISTANT CAST ALLOY
AMBIENT TEMPERATURE	0 TO +80°C
SHIPPING WEIGHT	10kg

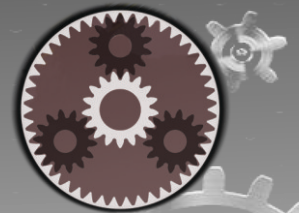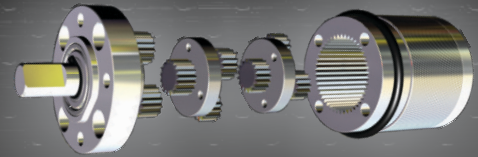


3 STEP PLANETARY GEAR REDUCER

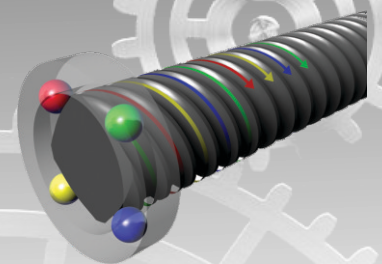


HIGH PRECISION 4 START BALL SCREW


In the interest of product improvements, specifications are subject to change without prior notice.




SWING GATE

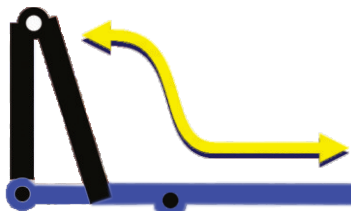

FOLDING GATE

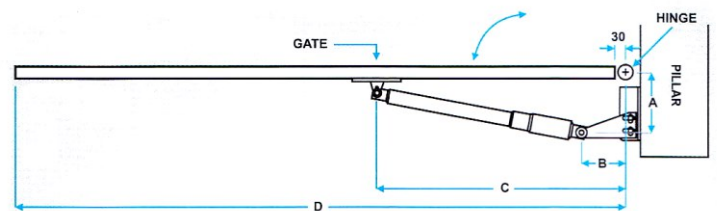

A	165mm ~ 180mm
B	128mm ~ 140mm
C	816mm ~ 837mm
D	Min 1000mm

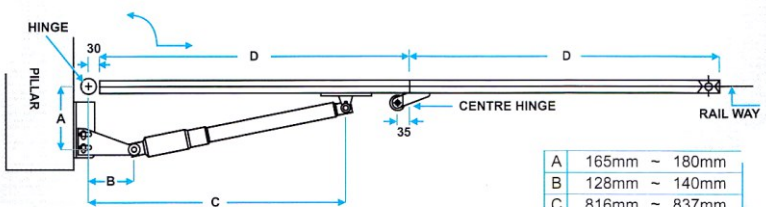

A	165mm ~ 180mm
B	128mm ~ 140mm
C	816mm ~ 837mm
D	Min.1000mm

Professional:

